

RMarkdown Source for Statistical Report Template

Contents

1	YAML Header	1
2	CSS	2
3	RMarkdown Setup Code Chunk	3
4	Complete Template Source	3

Throughout the semester, we will use a custom format for reporting analysis results instead of the default RMarkdown template. This short note explains the source code of the suggested version of the analytic report. The template source has three components:

1 YAML Header

In RMarkdown, the **YAML header** (also called the YAML metadata block) is a section at the top of an **.Rmd** file that defines document settings, such as output format, title, author, and other customization options. It uses YAML (YAML **Ain't** Markup Language) syntax, enclosed between `---` lines.

```
---
title: 'RMarkdown Source for Statistical Report Template'
author: ''
date: ''
output:
  html_document:
    # output document format
    toc: yes
    # add table contents
    toc_float: yes
    # toc_property: floating
    toc_depth: 4
    # depth of TOC headings
    fig_width: 6
    # global figure width
    fig_height: 4
    # global figure height
    fig_caption: yes
    # add figure caption
    number_sections: yes
    # numbering section headings
    toc_collapsed: yes
    # TOC subheading clapsing
    code_folding: hide
    # folding/showing code
    code_download: yes
    # allow to download complete RMarkdown source code
    smooth_scroll: yes
    # scrolling text of the document
    theme: lumen
    # visual theme for HTML document only
    highlight: tango
    # code syntax highlighting styles
  pdf_document:
    toc: yes
    toc_depth: 4
    fig_caption: yes
    number_sections: yes
  word_document:
    toc: yes
    toc_depth: '4'
---
```

2 CSS

CSS (Cascading Style Sheets)- is a stylesheet language used to control the presentation and layout of web pages. It works alongside HTML (which defines structure) and JavaScript (which adds interactivity) to create visually appealing and responsive websites.

```
'''{css, echo = FALSE}
div#TOC li { /* table of content */
  list-style:upper-roman;
  background-image:none;
  background-repeat:none;
  background-position:0;
}

h1.title { /* level 1 header of title */
  font-size: 24px;
  font-weight: bold;
  color: DarkRed;
  text-align: center;
}

h4.author { /* Header 4 - and the author and data headers use this too */
  font-size: 18px;
  font-weight: bold;
  font-family: "Times New Roman", Times, serif;
  color: DarkRed;
  text-align: center;
}

h4.date { /* Header 4 - and the author and data headers use this too */
  font-size: 18px;
  font-weight: bold;
  font-family: "Times New Roman", Times, serif;
  color: DarkBlue;
  text-align: center;
}

h1 { /* Header 1 - and the author and data headers use this too */
  font-size: 20px;
  font-weight: bold;
  font-family: "Times New Roman", Times, serif;
  color: darkred;
  text-align: center;
}

h2 { /* Header 2 - and the author and data headers use this too */
  font-size: 18px;
  font-weight: bold;
  font-family: "Times New Roman", Times, serif;
  color: navy;
  text-align: left;
}

h3 { /* Header 3 - and the author and data headers use this too */
  font-size: 16px;
  font-weight: bold;
  font-family: "Times New Roman", Times, serif;
  color: navy;
  text-align: left;
}

h4 { /* Header 4 - and the author and data headers use this too */
  font-size: 14px;
  font-weight: bold;
  font-family: "Times New Roman", Times, serif;
  color: darkred;
  text-align: left;
}
...

/* Add dots after numbered headers */
.header-section-number::after {
  content: ".";
}
...
'''
```

3 RMarkdown Setup Code Chunk

The RMarkdown setup code chunk is a special R code block used to configure global settings for your entire RMarkdown document. It typically appears at the beginning of your document (after the YAML header).


- **Set Default Options for All Chunks:** Controls how code/output behaves throughout the document using `knitr::opts_chunk$set()`.
- **Load Required Packages:** Preload libraries so they're available for all subsequent chunks.
- **Define Variables/Functions:** Initialize objects or helper functions used across the document.
- **Configure Rendering Behavior:** Adjust caching, figure formats, or error handling globally.

```
---{r setup, include=FALSE}
# code chunk specifies whether the R code, warnings, and output
# will be included in the output files.

if (!require("knitr")) {          # use conditional statement to detect
  install.packages("knitr")        # whether a package was installed in
  library(knitr)                  # your machine. If not, install it and
}                                  # load it to the working directory.
#
knitr::opts_chunk$set(echo = TRUE, # include code chunk in the output file
                      warning = FALSE, # sometimes, you code may produce warning messages,
                                      # you can choose to include the warning messages in
                                      # the output file.
                      results = TRUE,  # you can also decide whether to include the output
                                      # in the output file.
                      message = FALSE, # suppress messages
                      comment = NA,    # remove the default leading hash tags in the output
                      )
---
```

4 Complete Template Source

After opening an R Markdown document, you should delete the default simple YAML and the initial setup code chunk. Then, copy and paste all three components mentioned above (YAML, CSS, and the setup chunk). Whenever you use a new package, include it in the setup code chunk using the suggested conditional statement.

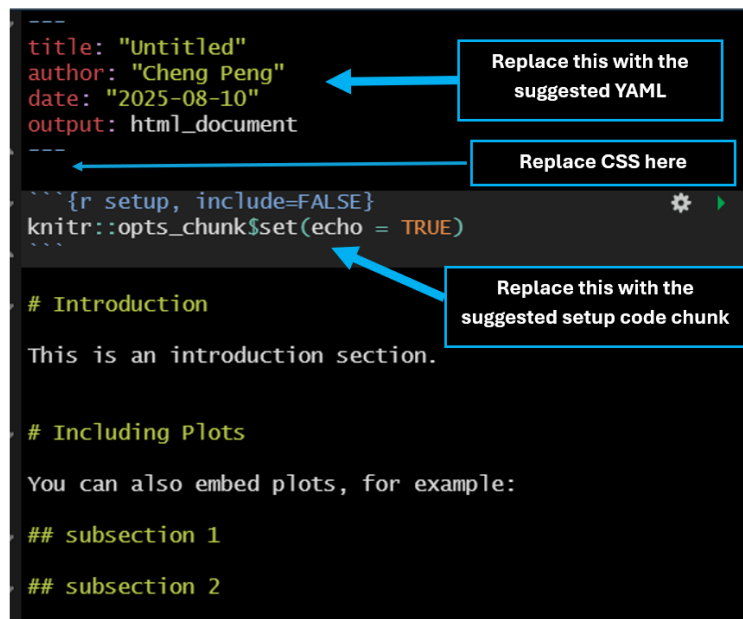

The screenshot shows an R Markdown document template with three main sections highlighted by blue arrows and callout boxes:

- YAML Header:** The first section contains metadata like `title: "Untitled"`, `author: "Cheng Peng"`, `date: "2025-08-10"`, and `output: html_document`. A callout box labeled "Replace this with the suggested YAML" points to this section.
- Setup Code Chunk:** The second section is an R code chunk starting with `---{r setup, include=FALSE}` and containing `knitr::opts_chunk$set(echo = TRUE)`. A callout box labeled "Replace this with the suggested setup code chunk" points to this section.
- Document Content:** The third section contains the main text of the document, including a heading `# Introduction` and a paragraph "This is an introduction section." A callout box labeled "Replace CSS here" points to the space between the YAML header and the setup code chunk.